

SPS fibre FORM Instrument Cabinet Enclosure Type FF570


Dimensions: (Approx.) Height x Width x Depth
54"(1372mm) x 37"(940mm) x 24"(610mm)

Weights: (Approx.)

Un-Insulated 110 lbs. / 50 kgs.

Insulated 130 lbs. / 60 kgs.

SPS fibre FORM FF570 enclosure is manufactured using the "Prestovac" process with glass reinforced epoxy vinyl ester resin. The cabinet is light gray in color with a "Gel-Coat" outer surface for ultimate "UV" protection. Cabinets are complete with stainless steel hinges and a three point closing mechanism. Enclosures use a neoprene gasket to a Nema 4x standard.

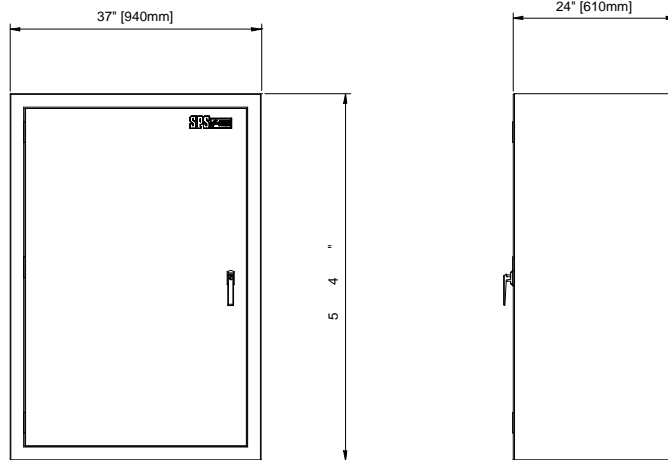

OPTIONS:

- | | |
|--------|---|
| SI-570 | - Extra Insulation (Sandwiched Layers) |
| SD | - Single Door Opening |
| DD | - Double Door Opening |
| CMSS | - Stainless Steel Corner Mount Element |
| BMA | - Bulkhead Mount Area |
| DL | - External Drip Lip |
| WB570 | - External Surface Mount Bracket (Galvanized) |
| MP570 | - Galvanized Internal Mounting Plate ** |
| RMS570 | - Internal Mounting Rail System |
| PW | - Plexiglas Window |
| SG | - Safety Glass Window |
| BASE | - FRP Base |

