

## SPS fibre FORM Instrument Protection Enclosure Type FF106 .....



Dimensions: (Approx.) Height x Width x Depth  
27-1/2"(700mm)x18-1/2"(470mm) x 15"(380mm)

Weights: (Approx.)

Un-Insulated 39 lbs. / 17.75 kgs.

Insulated 44 lbs. / 20 kgs.

SPS fibre FORM enclosures are "Resin Transfer Molded" with glass reinforced epoxy vinyl ester resin. The outer surface standard is light gray colored "Gel-Coat" for ultimate "UV" protection. Stainless steel hinges and clasps combine with a polyurethane gasket to provide Nema 4X protection.

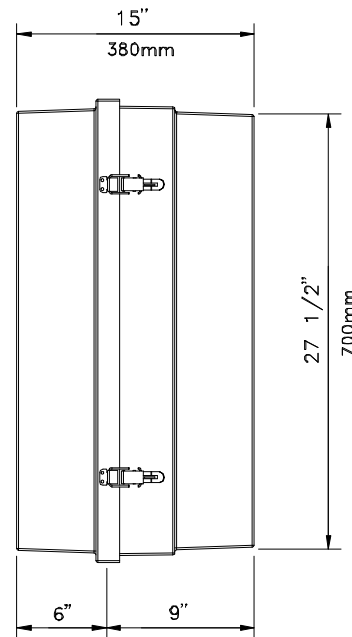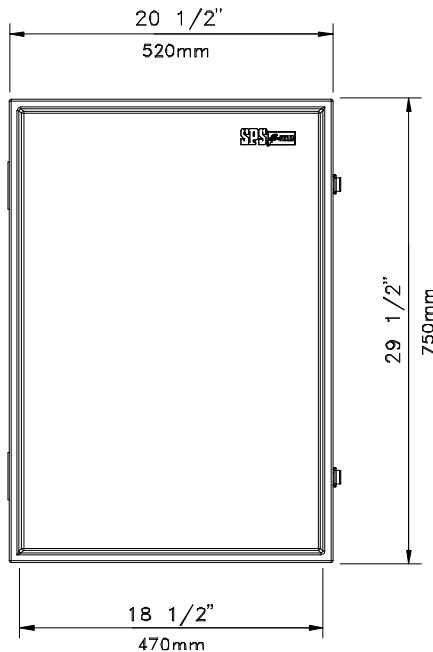

### OPTIONS:

I-PUAL  
I-PUFR  
I-PUSS  
LPS  
CMSS  
CMCSP  
IMP  
IMPH  
IMPV  
EMP  
GMP  
GWB  
RMS  
PW  
SW

- Extra Insulation (Aluminum Foil)
- Extra Insulation (FRP coated)
- Extra Insulation (Stainless Foil)
- Stainless Lid Prop-Stay
- Stainless Steel Corner Mount
- Plated Steel Corner Mount
- Internal 2" Instrument Mount Post
- Internal Horizontal 2" Mount Post
- Internal Vertical 2" Mount Post
- External 2" Post Mount Hub
- Galvanized Mounting Plate
- Galvanized Wall Mount Bracket
- Internal Mounting Rail System
- Plexi-Glass Window
- Safety Glass Window

