

SPS fibre FORM Instrument Protection Enclosure Type FF108



Dimensions: (Approx.) Height x Width x Depth
27-1/2"(700mm)x18-1/2"(470mm) x 20 1/4"(515mm)

Weights: (Approx.)

Un-Insulated 44 lbs. / 20 kgs.

Insulated 50 lbs. / 23 kgs.

SPS fibre FORM enclosures are "Resin Transfer Molded" with glass reinforced epoxy vinyl ester resin. The outer surface standard is light gray colored "Gel-Coat" for ultimate "UV" protection. Stainless steel hinges and clasps combine with a silicone gasket to provide Nema 4X protection.

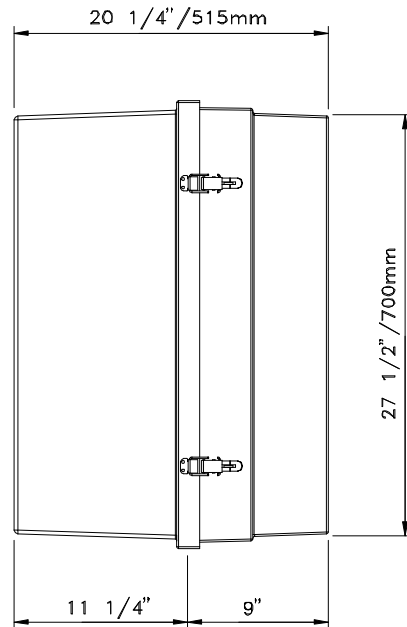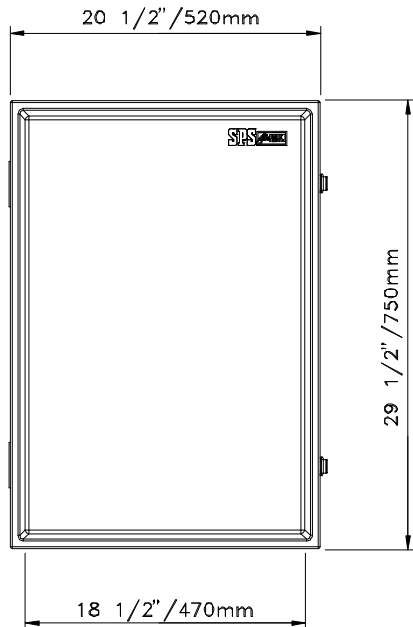

OPTIONS:

I-PUAL
I-PUFR
I-PUSS
LPS
CMSS
CMCSP
IMP
IMPH
IMPV
EMP
GMP
GWB
RMS
PW
SW

- Extra Insulation (Aluminum Foil)
- Extra Insulation (FRP coated)
- Extra Insulation (Stainless Foil)
- Stainless Lid Prop-Stay
- Stainless Steel Corner Mount
- Plated Steel Corner Mount
- Internal 2" Instrument Mount Post
- Internal Horizontal 2" Mount Post
- Internal Vertical 2" Mount Post
- External 2" Post Mount Hub
- Galvanized Mounting Plate
- Galvanized Wall Mount Bracket
- Internal Mounting Rail System
- Plexi-Glass Window
- Safety Glass Window

