

SPS fibre FORM Non-Metallic Protection Enclosure Type FF136



Dimensions: (Approx.) Height x Width x Depth
30"(760mm) x 16"(405mm) x 6 3/4"(170mm)

Wall Thickness: 1/8" / 3 mm

Weights: (Approx.)

Un-Insulated 15 lbs. / 7 kgs.

SPS/fibreFORM enclosures are "Resin Transfer Molded" with glass reinforced epoxy vinyl ester resin. The outer surface standard is light gray coloured "Gel-Coat" for ultimate "UV" protection. Polypropylene hinges and screws along with flexible draw latches combine with a neoprene gasket to provide protection.

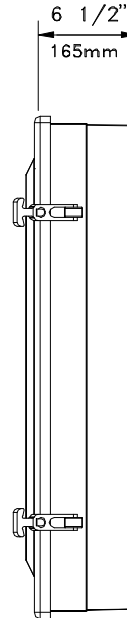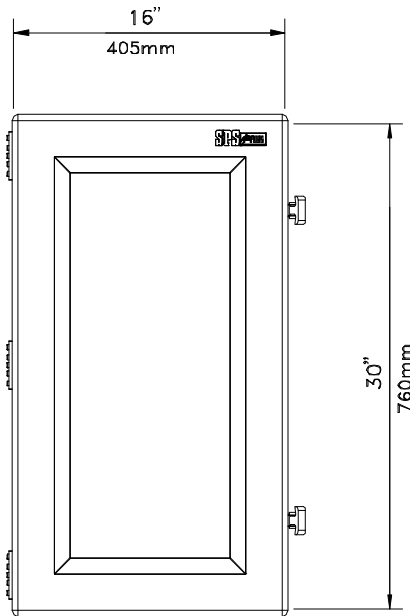

OPTIONS:

- | | |
|--------|---------------------------------------|
| VEGC | - Vinly Ester Gel-Coat |
| VEFR | - Vinyl Ester Fire Retardant Gel-Coat |
| PEGC | - Polyester Base Gel-Coat |
| FSL | - Fiberglass Secondary Latch |
| PVCCM | - PVC Corner Mount Bolts & Nuts |
| PVCCMP | - PVC Internal Mounting Plate |
| FMP | - Fiberglass Internal Mounting Plate |
| FWB | - Fiberglass Wall Mount Brackets |
| FPB | - Fiberglass 2" Pipe Mount Brackets |
| FGG | - Fiberglass Secondary Gasket Guard |

