
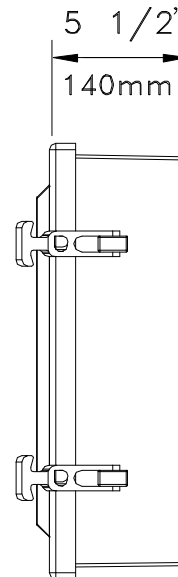


SPS fibre FORM Instrument Protection Enclosure Type FF186R

Dimensions: (Approx.) Height x Width x Depth
16"(405mm) x 11"(280mm) x 5 1/2"(140mm)
Wall Thickness: 1/8" / 3 mm
Weights: (Approx.)
Un-Insulated 8 lbs. / 3.5 kgs.

SPS/fibreFORM enclosures are "Resin Transfer Molded" with glass reinforced epoxy vinyl ester resin. The outer surface standard is light gray colored "Gel-Coat" for ultimate "UV" protection. Polypropylene hinges and screws along with flexible draw latches combine with a neoprene gasket to provide protection.

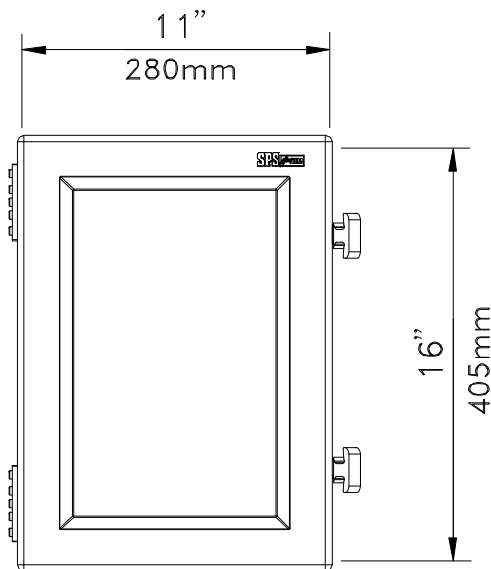

OPTIONS:

VEGC	- Vinyl Ester Gel-Coat
VEFR	- Vinyl Ester Fire Retardant Gel-Coat
PEGC	- Polyester Base Gel-Coat
FSL	- Fiberglass Secondary Latch
PVCCM	- PVC Corner Mount Bolts & Nuts
PVCMP	- PVC Internal Mounting Plate
FMP	- Fiberglass Internal Mounting Plate
FWB	- Fiberglass Wall Mount Brackets
FPB	- Fiberglass 2" Pipe Mount Brackets
FGG	- Fiberglass Secondary Gasket Guard

