


SPS fibre FORM Modular Cabinet Enclosures..... Panel Configurations



'Y'	'X'	'Z' (max.)
12"	2"	120"
18"		120"
24"		120"
30"	3"	120"
36"		120"
48"	4"	120"
Custom		Custom

Standard height 'Z' dimension is 96" or 120"
Custom sizing available

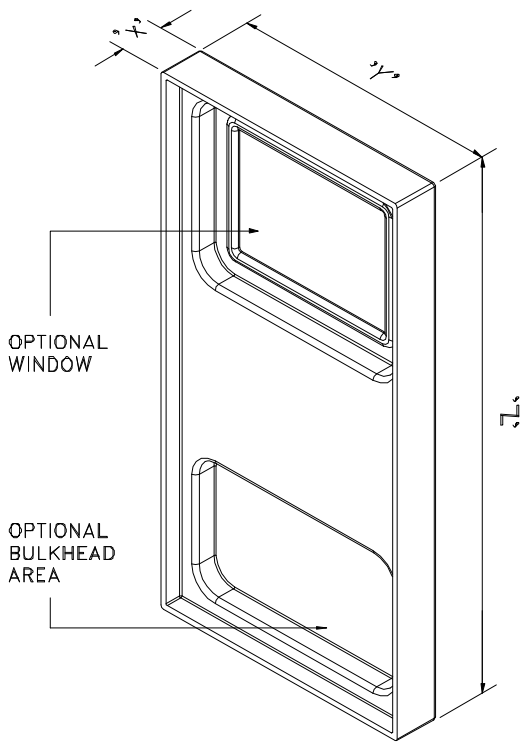

SPS fibre FORM vacuum formed panels have polyurethane insulation encapsulated inside in thickness available up to 3", providing overall R values of up to R30. Sections are assembled with pultrusion formed FRP square tubes, using stainless steel rivets and a RTV silicone seal providing a finished product which has high strength to weight ratio, as well as a zero maintenance exterior. The exterior of each panel actual has a 20 mil gel coated surface as an integral part of the construction which contains an Ultra Violet block to prevent any resin degradation by the sunlight. Optional resin materials include a polyester, isothalic (General Purpose) type suitable for most corrosive, and atmospheric conditions as well as an epoxy vinyl ester (Dow Derakane) type which allows self extinguishing qualities, and ability to go class one under ASTM E84 for fire resistance.