


SPS fibre FORM Modular Cabinet Enclosures Post Configurations

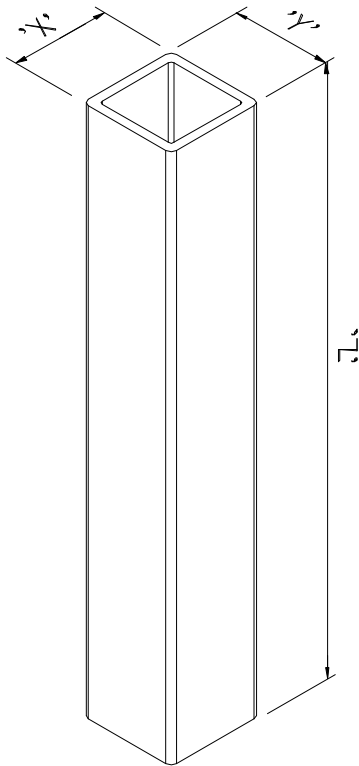

'X'	'Y'	Thk.	'Z'(max.)
2"	2"	1/8"	240"
2"	2"	1/4"	240"
3"	3"	1/4"	240"
4"	4"	1/4"	240"

Posts are used in assembly of SPSfibreFORM's modular building enclosures. Posts are FRP pultruded shapes made from a combination of fiberglass roving, continuous strand mat and veil materials with vinyl ester resin for optimum corrosion resistance combined with fire retardant qualities. Color standards are gray and white with other colors as a special option.

Panels are attached to posts using stainless steel rivets (approx. every 8") plus they are sealed with silicone on each mating surface for leak proof joints.

Posts are normally left hollow, however they can be filled with polyurethane foam insulation to increase the overall R value of a finished wall.

