

SPS fibre FORM Instrument Protection Enclosure Type FF103



Dimensions: (Approx.) Height x Width x Depth
18"(460mm) x 15"(380mm) x 15"(380mm)

Weights: (Approx.)

Un-Insulated 17 lbs. / 7.75 kgs.

Insulated 21 lbs. / 9.5 kgs.

SPS/fibreFORM enclosures are "Resin Transfer Molded" with glass reinforced epoxy vinyl ester resin. The outer surface standard is light gray coloured "Gel-Coat" for ultimate "UV" protection. Stainless steel hinges and clasps combine with a silicone gasket to provide Nema 4X protection.

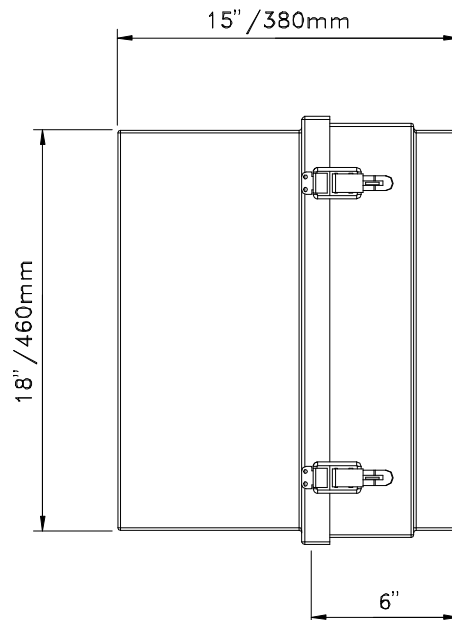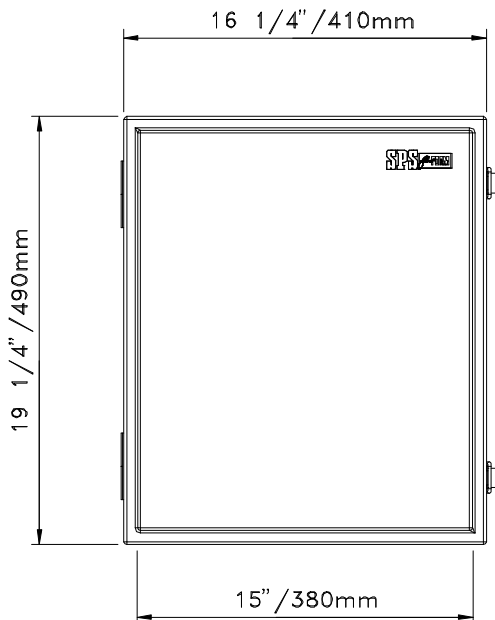

OPTIONS:

- | | |
|--------|-------------------------------------|
| I-PUAL | - Extra Insulation (Aluminum Foil) |
| I-PUFR | - Extra Insulation (FRP coated) |
| I-PUSS | - Extra Insulation (Stainless Foil) |
| LPS | - Stainless Lid Prop-Stay |
| CMSS | - Stainless Steel Corner Mount |
| CMCSP | - Plated Steel Corner Mount |
| IMP | - Internal 2" Instrument Mount Post |
| EMP | - External 2" Post Mount Hub |
| GMP | - Galvanized Mounting Plate |
| GWB | - Galvanized Wall Mount Bracket |
| RMS | - Internal Mounting Rail System |
| PW | - Plexi-Glass Window |
| SW | - Safety Glass Window |

